


## Top operating attachment for S11/P11 ladders

Locate M8 bolt with locknut already in position into end hole on ladder arm and secure using second locknut (see drawing). This can be done on the right or left hand side of the ladder as appropriate.

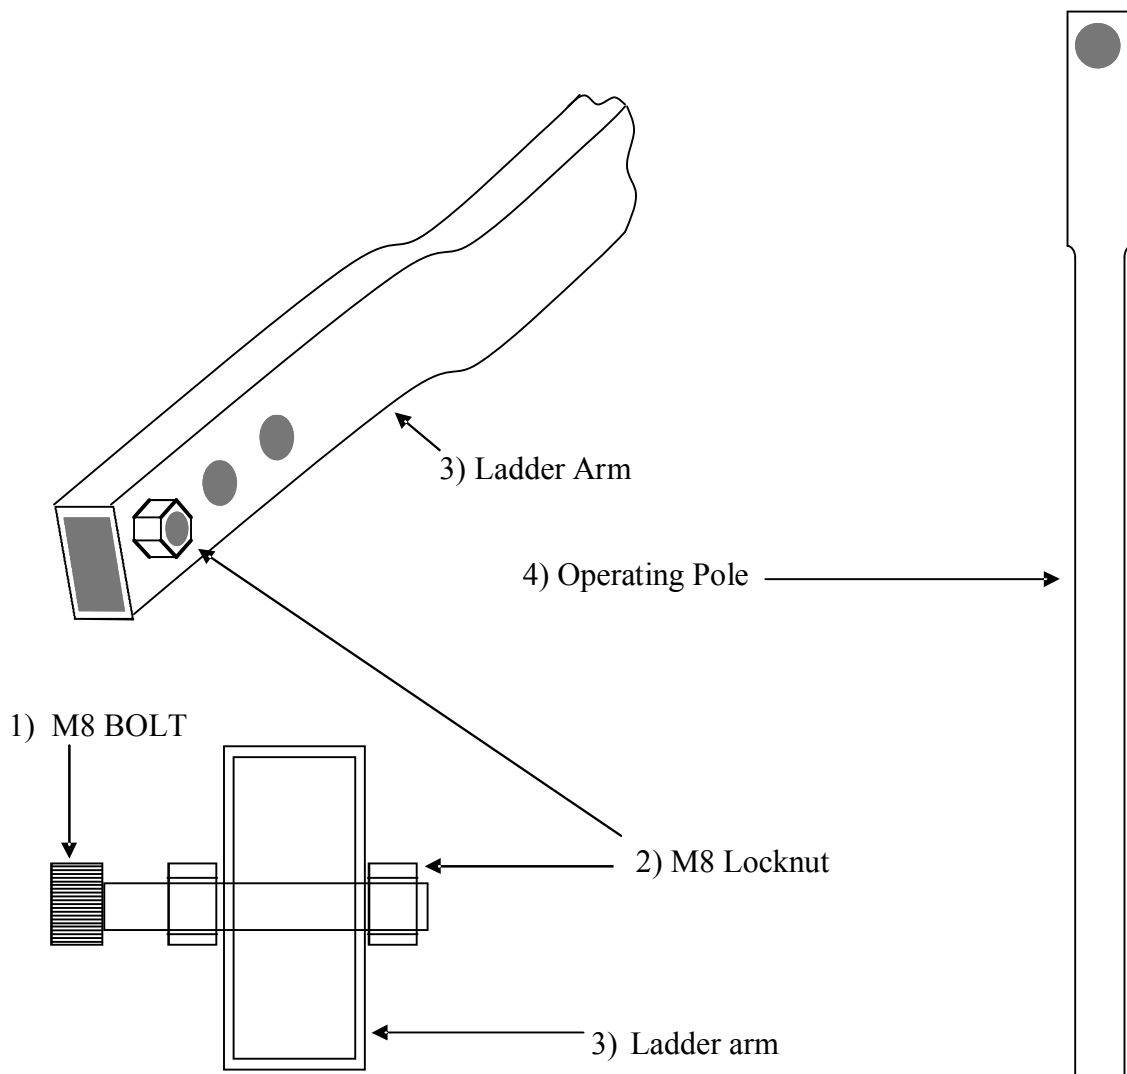

To operate - release catch on trap door. Engage hole in end of operating pole over head of M8 bolt. Holding the pole away from the opening and in line with the ladder (to start with), press operating pole down to push ladder fully to floor. To close pull pole upwards to fold ladder onto door, continue upwards to close door sharply.