


## Description

- ▲ The Caernarvon is one of the best alternatives to a permanent stair, as the timber stairway slides up and 'disappears' into the loft.
- ▲ Counterbalanced with a coil spring system to aid the deployment and retraction of the stairway.
- ▲ Two model sizes are available and both are manufactured in solid Ash.
- ▲ The **Model 400** has a stairway width of 17" (430mm); the **Model 700** has a stairway width of 19" (480mm).
- ▲ The tread depth is approx. 5" (140mm).
- ▲ The stair climbs at a shallow angle of 57° which makes for an easy climb.
- ▲ Comes with one handrail as standard, a second additional handrail is available.
- ▲ Easily stores away in loft area in one complete section (does not fold).
- ▲ Unit supplied complete with door (no lining provided).
- ▲ Can easily be operated from below or above.
- ▲ Can support a maximum weight of 270kgs.



**Caernarvon Diagram**

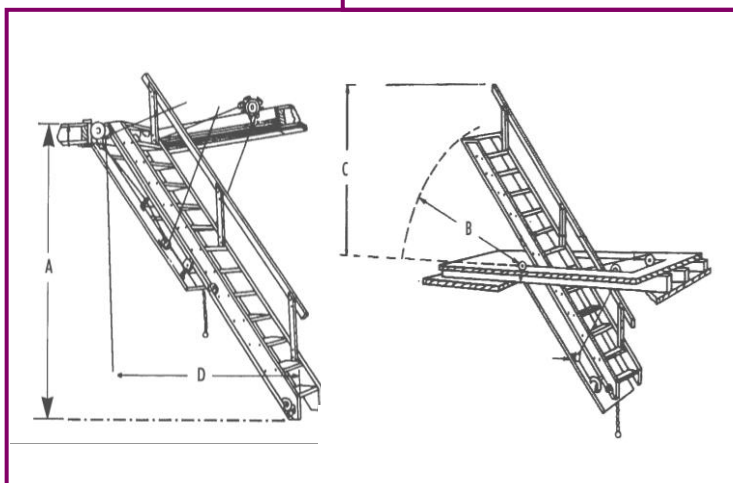

## Caernarvon Information

Size	Floor to Floor Height (A)	Folding Arc in Loft (B)	Storage Height in Loft (C)	Going (D)	Door Size (model 700)	Door Size (model 400)
1	7'7" - 7'10" 2311 - 2388mm	4'1" 1245mm	2'11" 890mm	5'4" 1625mm	2'6" x 5'6" 764 x 1680mm	2'0" x 5'6" 611 x 1680mm
2	7'11" - 8'4" 2413 - 2540mm	4'8" 1422mm	3'5" 1042mm	5'8" 1727mm	2'6" x 5'6" 764 x 1680mm	2'0" x 5'6" 611 x 1680mm
3	8'5" - 8'10" 2565 - 2693mm	5'3" 1600mm	3'11" 1194mm	6'0" 1829mm	2'6" x 5'6" 764 x 1680mm	2'0" x 5'6" 611 x 1680mm
4	8'11" - 9'4" 2718 - 2845mm	5'10" 1778mm	4'5" 1346mm	6'4" 1930mm	2'6" x 5'6" 764 x 1680mm	2'0" x 5'6" 611 x 1680mm
5	9'5" - 9'10" 2870 - 2998mm	5'10" 1778mm	4'6" 1372mm	6'8" 2032mm	2'6" x 6'0" 764 x 1830mm	2'0" x 6'0" 611 x 1830mm
6	9'11" - 10'4" 3022 - 3150mm	6'6" 1982mm	5'1" 1550mm	6'11" 2108mm	2'6" x 6'0" 764 x 1830mm	2'0" x 6'0" 611 x 1830mm
7	10'5" - 10'10" 3175 - 3302mm	7'1" 2159mm	5'5" 1651mm	7'4" 2235mm	2'6" x 6'0" 764 x 1830mm	2'0" x 6'0" 611 x 1830mm