






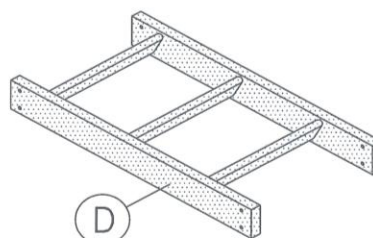


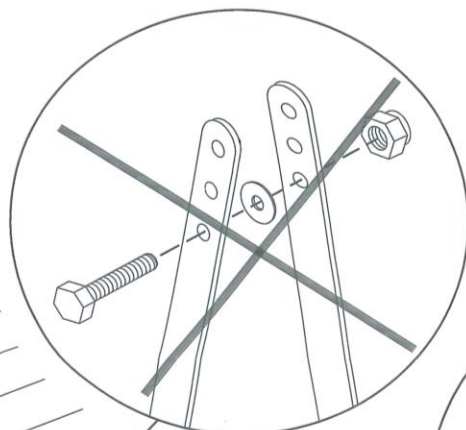
# IMPORTANT:

WHERE FLOOR TO CEILING HEIGHT IS GREATER THAN 3m.  
 RELEASING THE SAFETY CATCH WHILST SUPPORTING  
 THE LADDER MAY BE DIFFICULT  
 IN THIS CASE WE WOULD RECOMMEND THE USE  
 OF A SMALL STEP LADDER FOR SAFE OPERATION.




POS.89 	POS.32  22mm.	POS.5  16mm.
	POS.48 	POS.13 
	POS.88 	POS.14  34mm.

1





5



16mm.


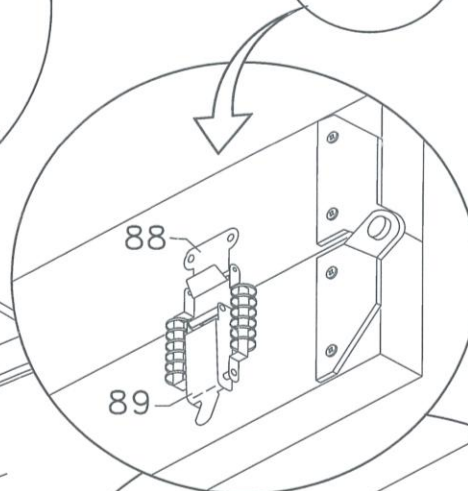


88

89

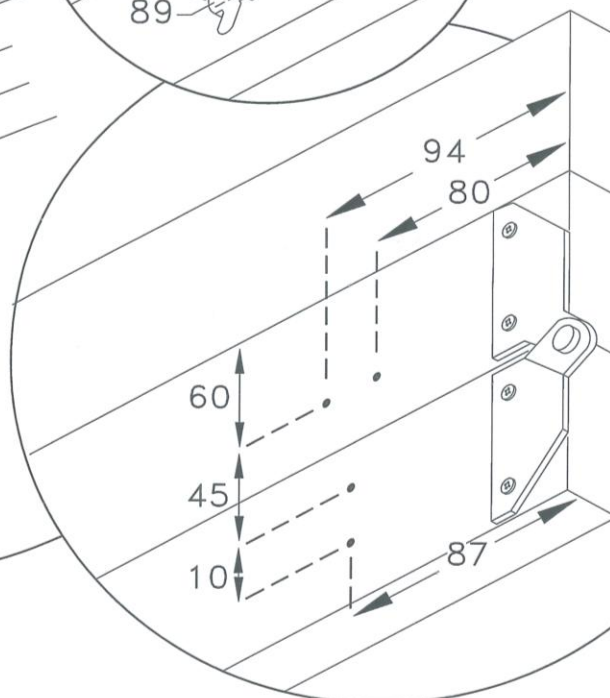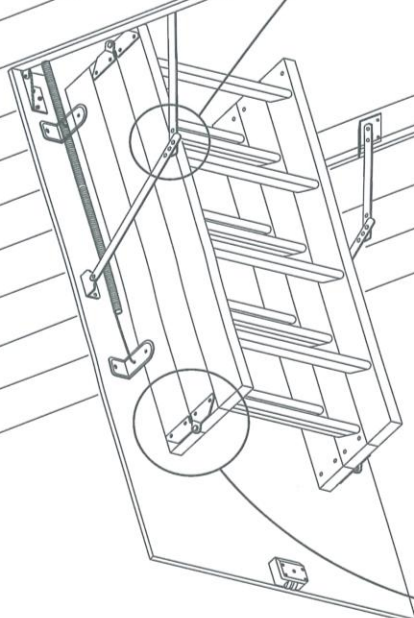

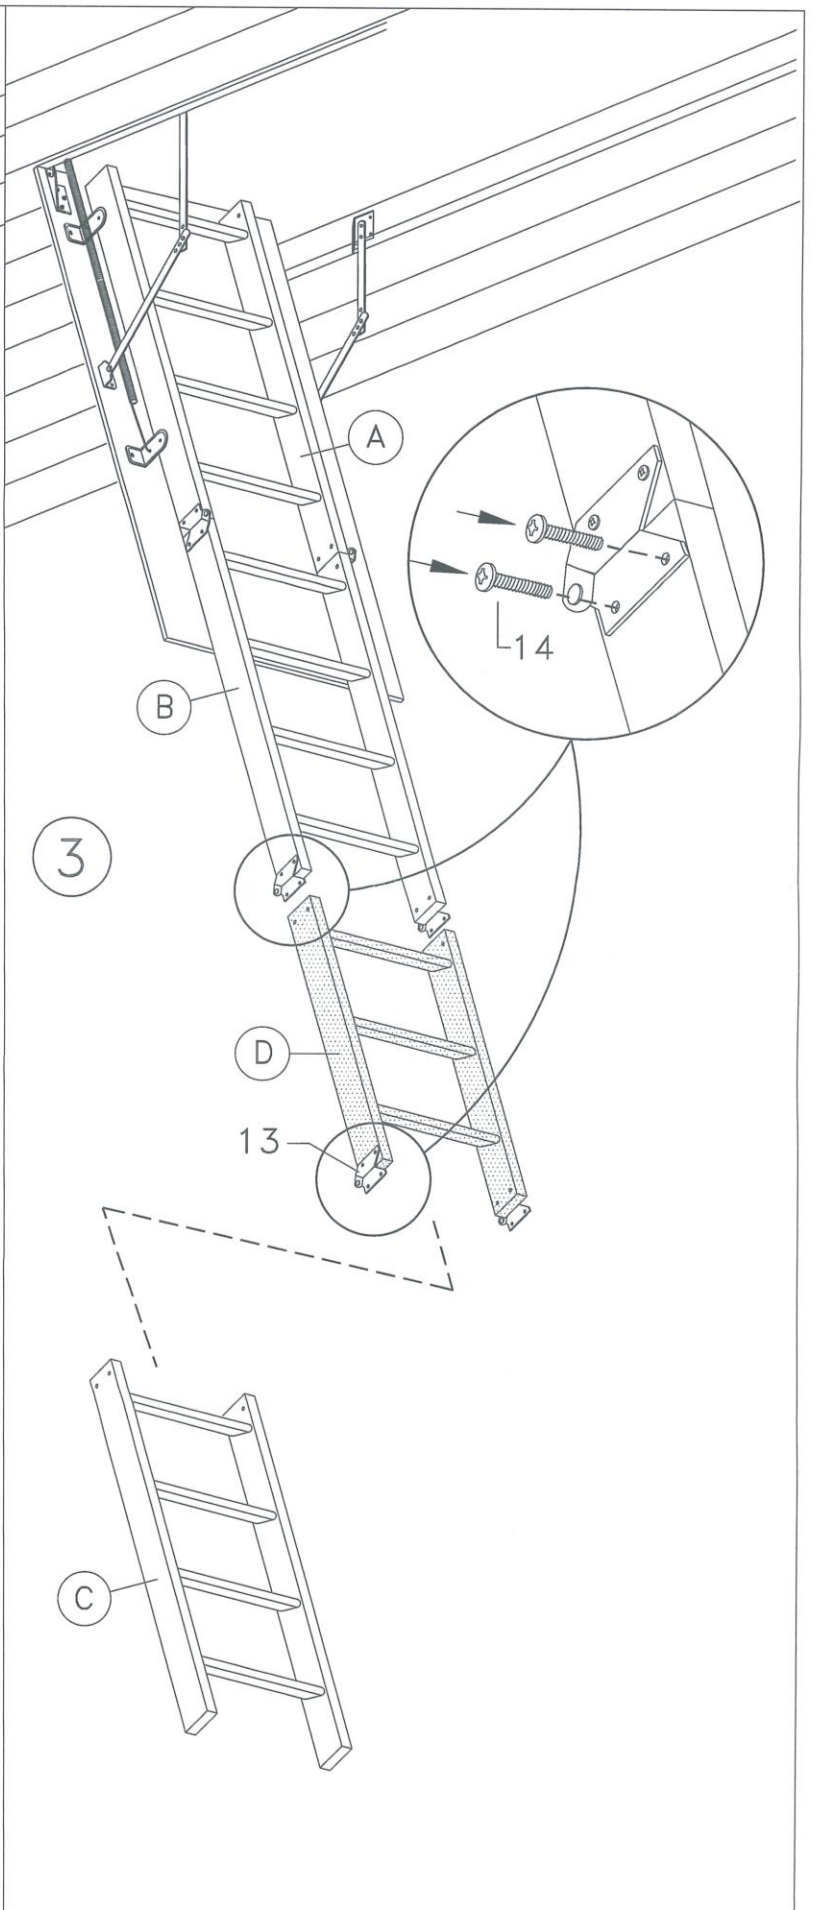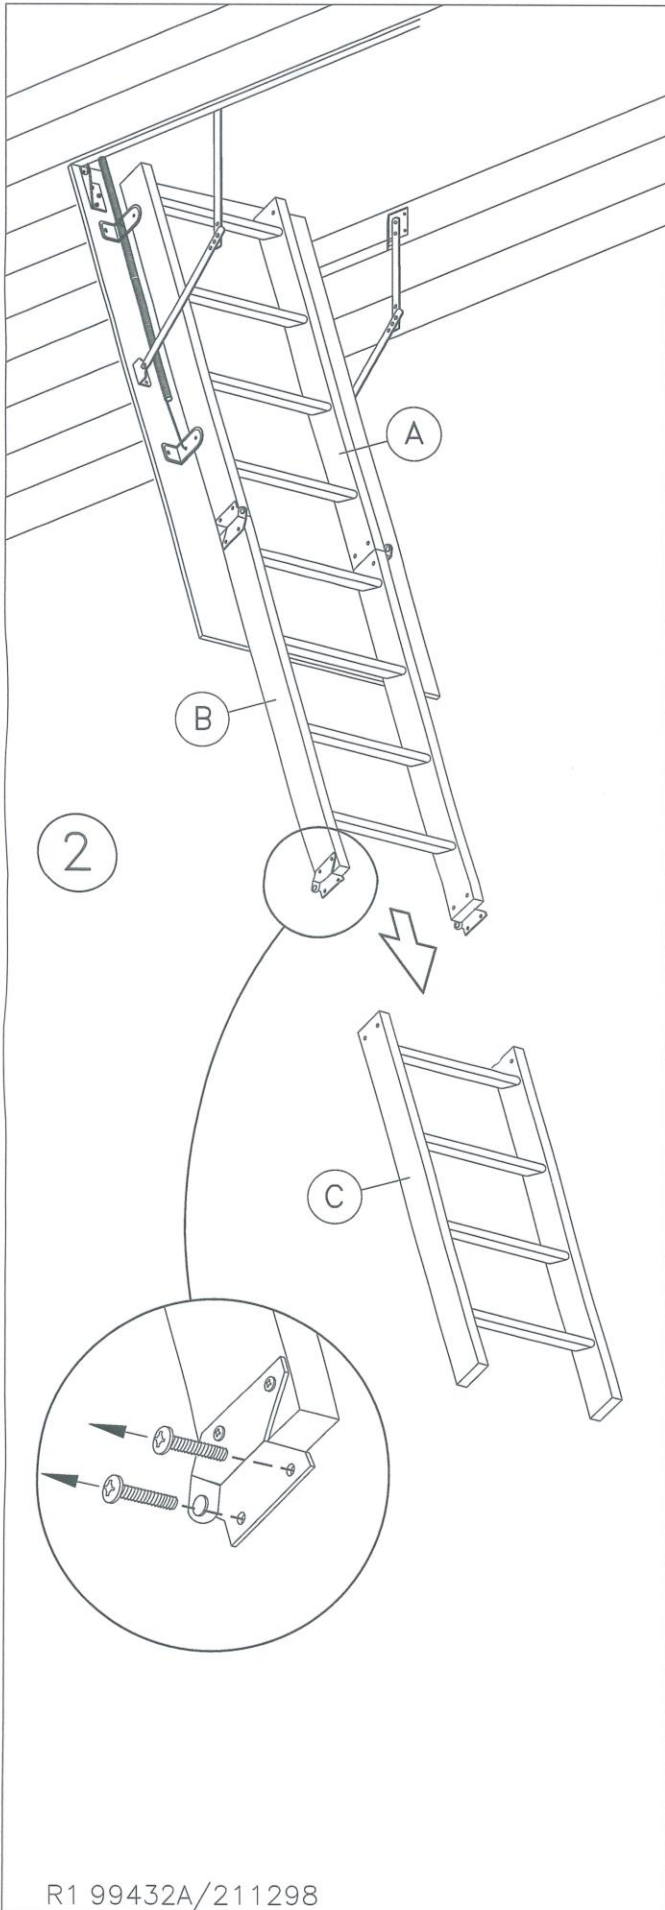

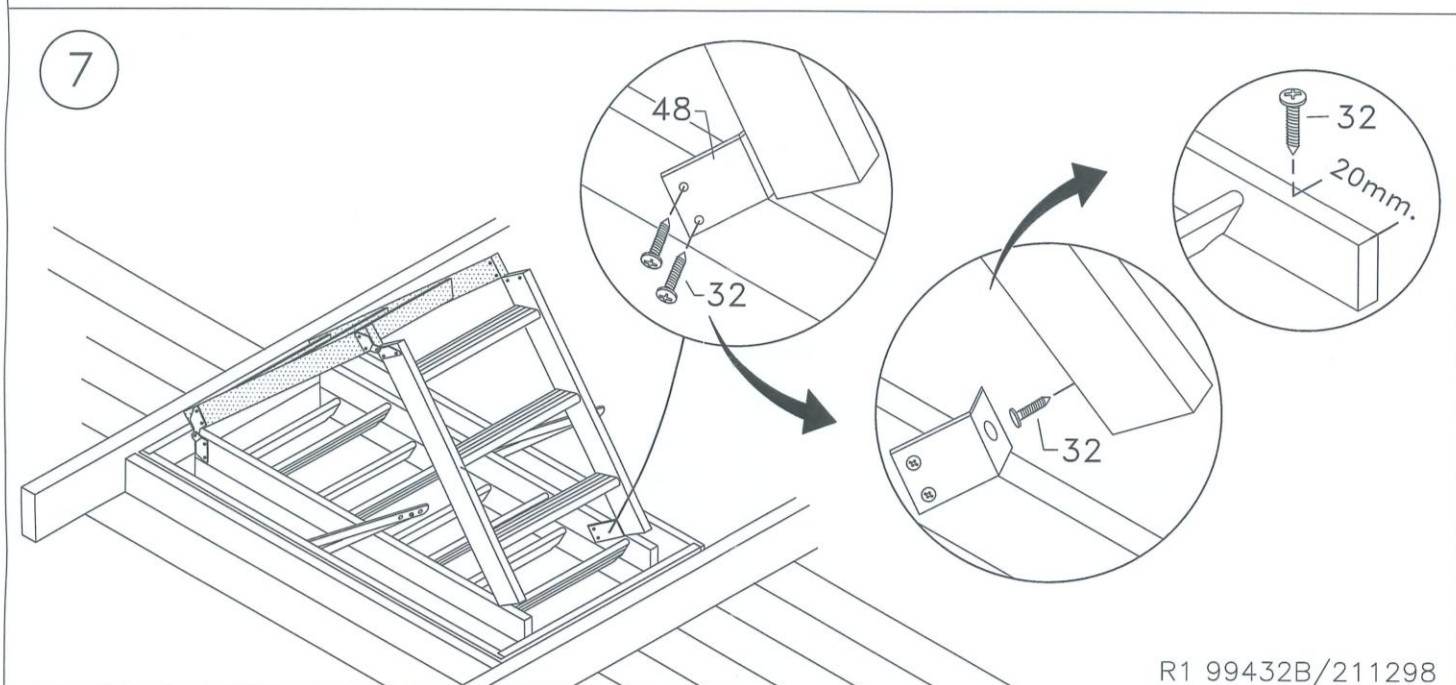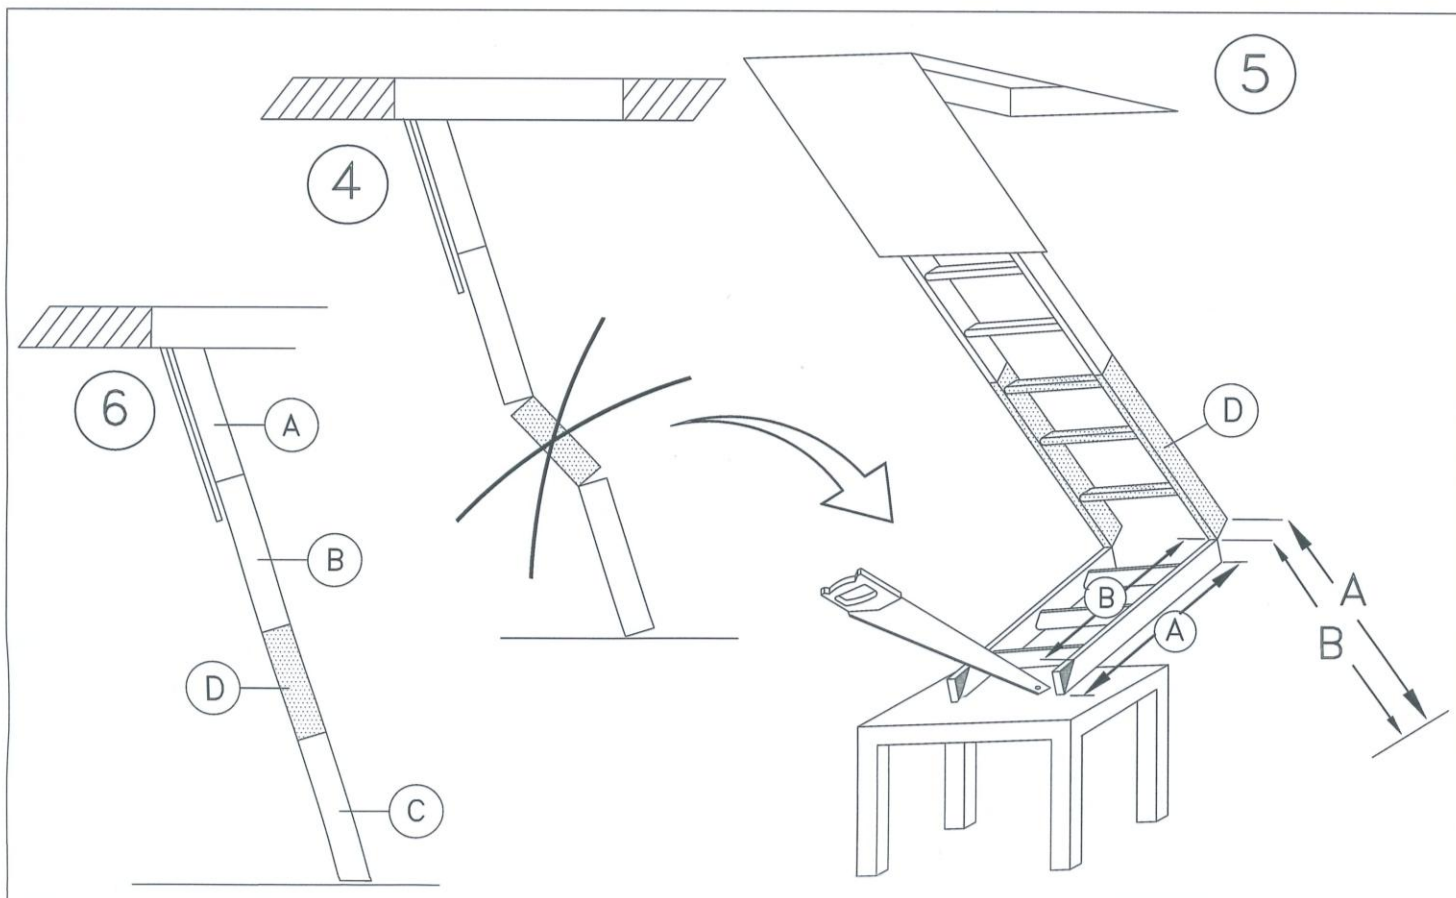

R1 99432B/211298

**OPERATION INSTRUCTIONS** Always follow the following sequences:

1. Open the trapdoor using the pole provided
2. Disengage the bottom section from the locking plate
3. Disengage the safety lock that secures the first 2 ladder sections.
4. Unfold the ladder to the floor by holding both legs with a good grip
5. To fold and close you loft ladder, follow the above mentioned sequences in reverse.