

METAL
LOFT LADDERS



METAL FOLDING SECTION LOFT LADDERS

LMK
KOMFORT



Unlike the LMS the **LMK** loft ladder has a white hatch and red handrail. The handrail is fixed to the ladder brackets, making its use much easier.



White insulated hatch and handrail



stile ends



handrail



beige hatch



non-slip treads



peripheral seal





possibility of installing additional accessories pages 56-61

Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



LMK LOFT LADDER DIAGRAM

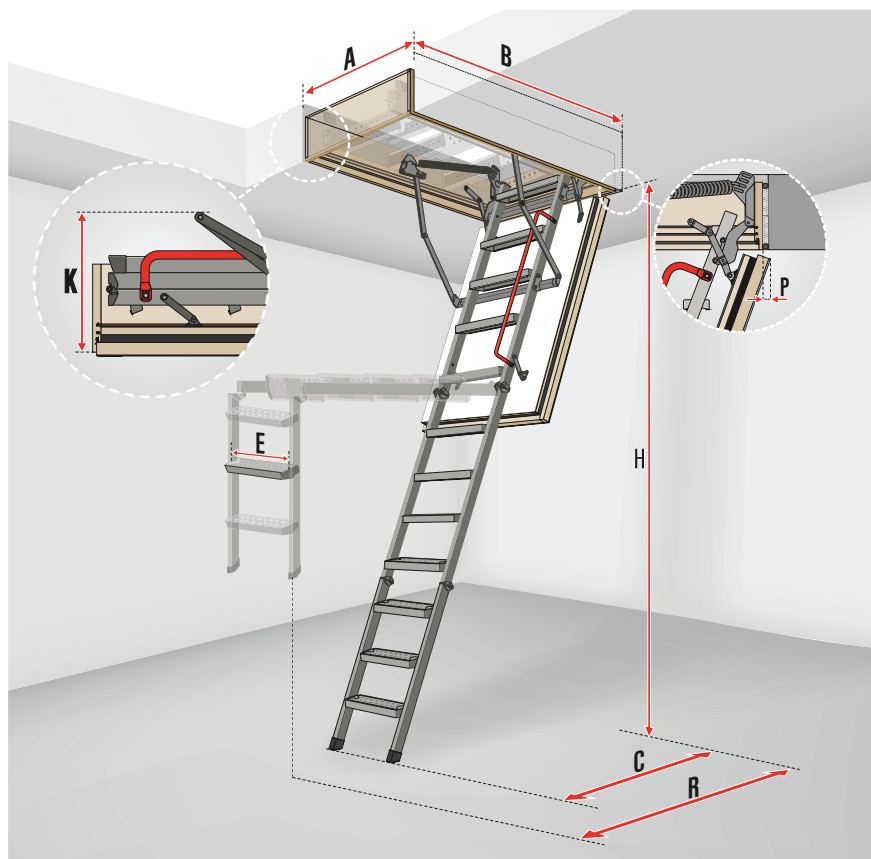

LMK LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280				305		
Minimum room height [cm]*	H _{min.}	220				245		
Height to be reached to operate the ladder [cm]	X	220				245		
Box external dimensions [cm]		58 x 118.4	68 x 118.4	68 x 128.4	68 x 138.4	68 x 128.4	68 x 128.4	68 x 138.4
Internal box dimensions [cm]		54 x 114	64 x 114	64 x 124	64 x 134	54 x 124	64 x 124	64 x 134
Folded ladder height [cm]	K	25.5						
Swing space [cm]	R	157				175		
Distance after ladder unfolding [cm]	C	118.5				127		
Box height [cm]		14						

LADDER PARAMETERS

Tread length [cm]	E	34						
Tread width [cm]		8						
Distance between treads [cm]		25						

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280				305		
Code		861401	861411	861412	861413	861451	861453	861454

Ladders are available only in sizes shown above.