

DOLLE CF36LM




ATTIC LADDER 92,5 X 60 CM - WITH 30 MM INSULATION

Dolle CF36LM attic ladder with 30 mm insulation = U-value 0,99 W/m₂ C. ClickFix is a complete line of attic ladders based on the unique patented ClickFix technology. The entire product range is known by the low u-value and the quick and easy installation. The low weight (approx. 25% less than traditional attic ladders) and the Click system make it possible for only 1 person to mount the ClickFix attic ladders. The insulation and the construction of the trapdoor reduces heat loss. Dolle CF36LM is delivered with non-slip treads for extra security and a wooden push/pull rod for easy operation of the attic ladder.

PRODUCTDATA

PRODUCTNAME	Dolle CF36LM
TYPE	4-section
MATERIAL	wood
PRODUCT-NO.	38761
FLOORHEIGHT	Max. 276 cm
NUMBER OF TREADS	12
OPENING SIZE	92,5x60 cm
INSULATION	30 mm
MATERIAL (CASING)	spruce
THICKNESS (CASING)	18 mm
HEIGHT (CASING)	115 mm
OUTSIDE CASING	90,0x57,6 cm
MATERIAL (TRAPDOOR)	white/white HDF 2 x 3
THICKNESS (TRAPDOOR)	36 mm
THICKNESS (TREADS)	17,5 mm
DEPTH (TREADS)	54 mm
WIDTH (TREADS)	400 mm
MATERIAL (TREADS)	beech
THICKNESS (STRING)	21 mm
DEPTH (STRING)	69 mm
U-VALUE	0,99

MEASUREMENTS

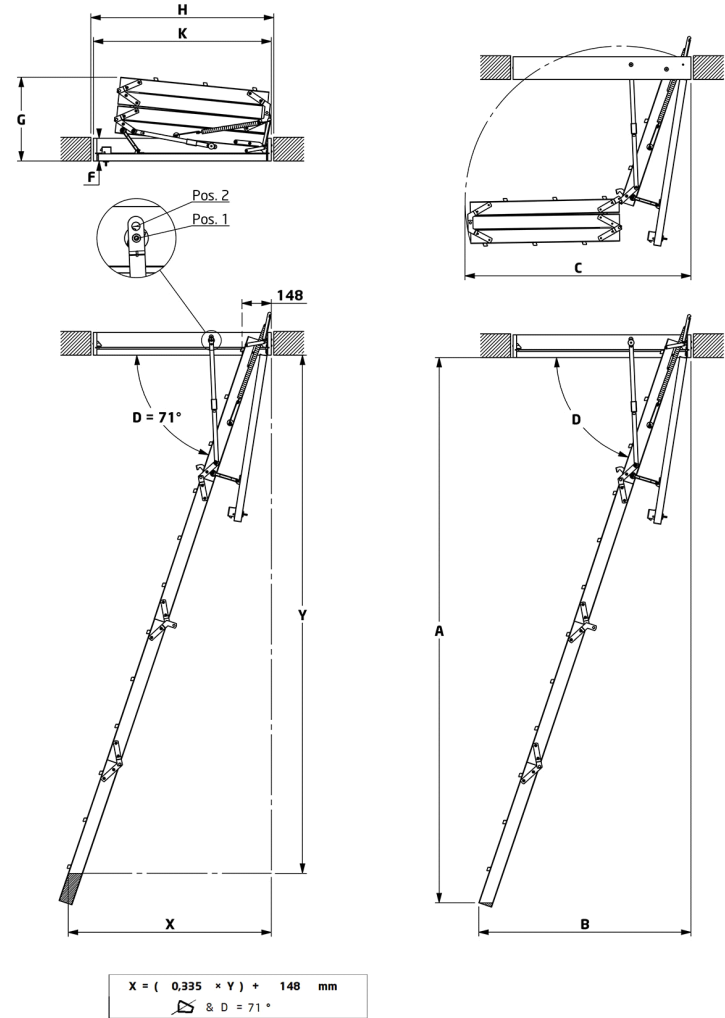

		Pos	A	A°	B	C	D	F	G	Model	H	K
			mm	mm	mm	mm	°	mm	mm		mm × mm	mm × mm
12	3-3-3-3	1	2760	2786	1074	1139	71			38761	925 × 600	900 × 576
		2	2816	2841	904	1098	74	115	424	38861	925 × 600	900 × 576